

CAPSULE PRESSURE GAUGES FOR LOW PRESSURES DN 63

For measurement of low pressure and vacuum within the ranges -600..0/0..600 mbar for use on gas and dry air.

Constructive and functional characteristics:

Accuracy: Type 1.6 according to EN 837-1. ($\pm 1,6\%$ E.S.)

Ranges: -600.. 0 to 0.. 600 mbar or any other equivalent unit of pressure or vacuum, standard ranges according to IN 837-3. Double scale in mbar and mmH₂O

Ambient temperature: -20...+65 ° C.

Process fluid temperature: max +65 °C.

Temperature error: Additional error when temperature of the pressure element deviates from 20°C: $\pm 0,5\%$ of E.S every 10°C of variation.

Working pressure:
Steady: Max 75% of E.S.
Fluctuating: 2/3 of E.S.

Temporal overpressure: 25% of E.S. during a short period of time.

Outdoor grade of protection: IP31.

Process connection: Lower connection 1/4" BSP

Process connection racord: in brass.

Capsule: phosphorous bronze.

Movement: In brass.

Case: Black painted steel.

Window: clear transparent.


Pointer: Black painted aluminium.



This publication does not try to establish the bases of a contract and the company keeps the right to modify without previous notice the design and the specifications of the instruments, in accordance with his politics of continued development.

**CAPSULE PRESSURE GAUGES
FOR LOW PRESSURES DN 63**

DIMENSIONS
Inches (mm)

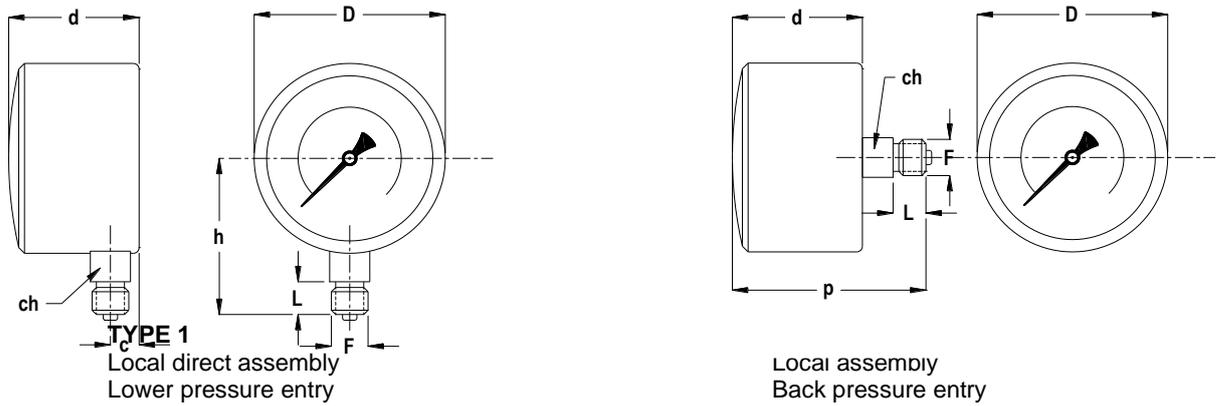

DN	TYPE	c	ch	d	D	F	h	L	p
2.4" (63)	1	0.39" (10)	0.55"X0.16" (14x4)	1.81" (46)	2.60" (66)	1/4BSP	2.18" (55,3)	0.51" (13)	
2.4" (63)	2		0.55"X0.16" (14x4)	1.81" (46)	2.60" (66)	1/4BSP		0.51" (13)	2.67" (68)

This publication does not try to establish the bases of a contract and the company keeps the right to modify without previous notice the design and the specifications of the instruments, in accordance with his politics of continued development.